





Rating	20A 125V, 10A 277V AC 3/4HP 125-250 VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	2P SPST ON-OFF		
Operation Force	600g±200g		



ON
ENCENDIDO
MARCHÉ

OFF
APAGADO
ARRÊT

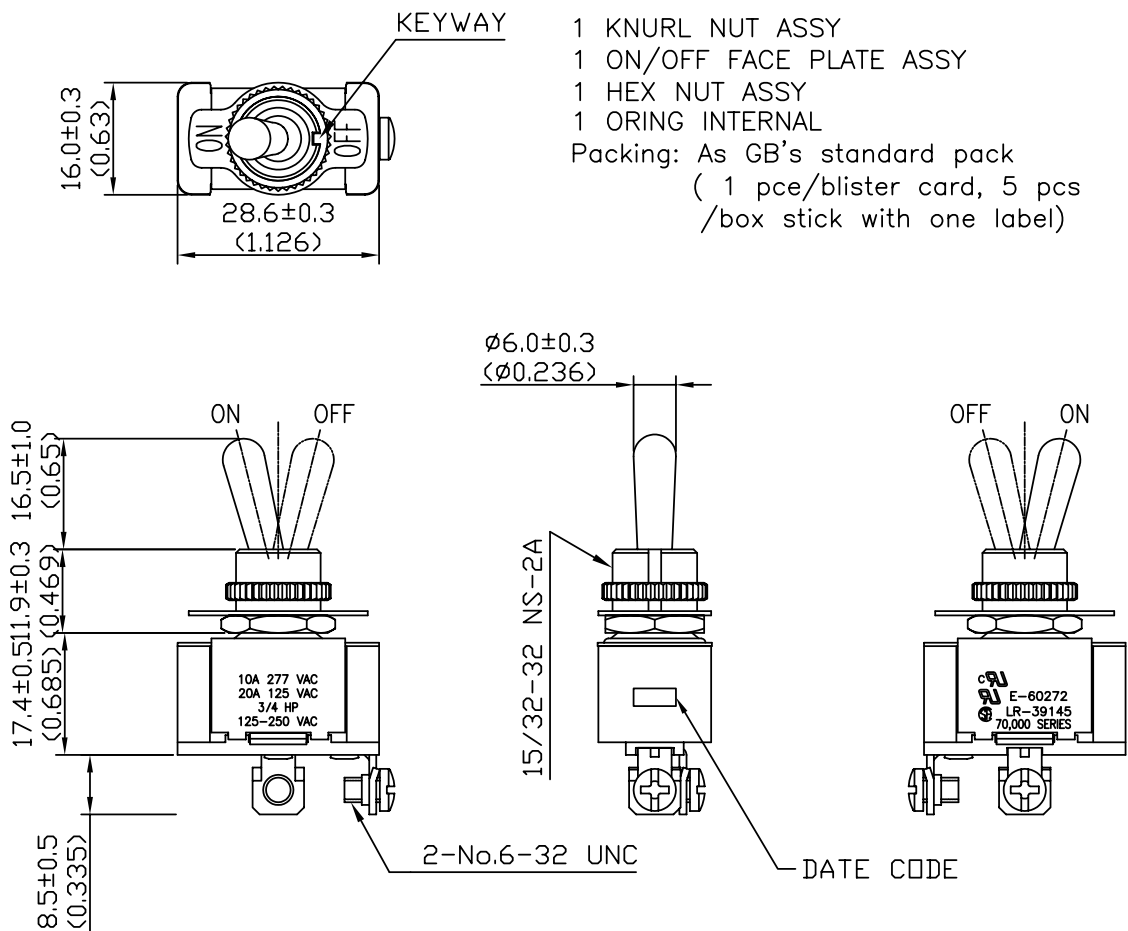